


RCCN 日成AG型公制电缆防水接头 AG Metric Nylon Cable Gland

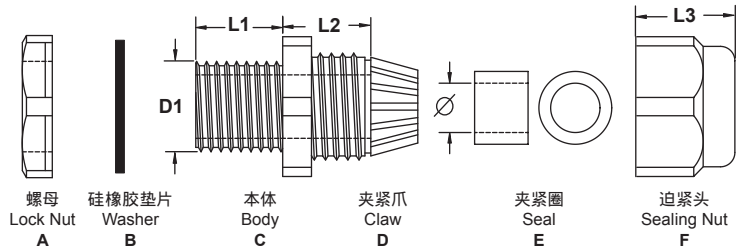

螺母规格:公制螺母(Metric/EN50262)。
 产品材质:A.C.D.F部位均采用环保尼龙原料制成.B耐老化硅橡胶制成.E采用耐油丁腈橡胶制成。
 产品认证:欧洲CE 欧洲环保ROHS,UL尼龙原料。 防火等级:UL94V-2。
 防护等级:在规定的卡口范围内,并使用防水垫片及夹紧圈旋紧迫紧头,达到IP68。
 颜色种类:灰白色(RAL7035)、黑色(RAL9005)。
 使用方法:先将本体穿于机板,再以螺母扭紧固定,线缆穿过迫紧头,扭紧迫紧头将其固定。
 工作温度:静态-40°C至85°C。
 产品特性:夹紧爪与夹紧圈一体成型之设计,配合迫紧头装配省时便利,夹紧电缆范围大,抗拉力强,可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。应用于电缆出线端的固定保护及密封防尘水。
 更多选择:另备多种范围夹紧圈,户外用时要求高的环境橡胶需通知更换为耐老化硅橡胶材质-AGH型。 型号例: AG-12WH

*Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
 *Suggested clearance hole for non-threaded mounting.
 *Suitable for fixing wires of machines, electrical applications, mechanical control boards/ boxes.
 *Material: Polyamide
 Neoprene for seal insert, with nut
 *Color: Black, White

根据安装需要:垫片可替换为O形圈

单位/Unit:mm

螺纹长度 Thread Length	型号 Item No.		螺母规格 Thread	适用电 缆外径 Cable Range Ø	螺纹外径 Thread O.D. D1	机板开孔 Panel Mounting Hole	螺纹长度 Thread Length L1	接合长度 Joint Length L2+L3	板手 Spanner size A&F	包装 Std.Pkg pcs	
	灰白色 White	黑色 Black									
标准型 standard	AG-12W	AG-12B	M12×1.5	3-6.5	12	12-12.3	8	22	17/16	100PCS	
	AG-14W	AG-14B	M14×1.5	4-8	14	14-14.3	8	26	19/19		
	AG-16W	AG-16B	M16×1.5	4-8	16	16-16.3	9	26	22/19		
	AG-16DW	AG-16DB	M16×1.5	5-10	16	16-16.3	9	26	22/22		
	AG-18W	AG-18B	M18×1.5	5-10	18	18-18.3	9	27	24/22		
	AG-20W	AG-20B	M20×1.5	6-12	20	20-20.3	11	28	27/24		
	AG-20DW	AG-20DB	M20×1.5	10-14	20	20-20.3	10	28	27/27		
	AG-22W	AG-22B	M22×1.5	10-14	22	22-22.3	11	30	30/27		
	AG-24W	AG-24B	M24×1.5	12-15	24	24-24.4	10	30	30/27		
	AG-25SW	AG-25SB	M25×1.5	9-16	25	25-25.4	10	35	32/33		
	AG-25W	AG-25B	M25×1.5	13-18	25	25-25.4	10	35	32/33		
	AG-27W	AG-27B	M27×1.5	13-18	27	27-27.4	10	35	36/33		
	AG-30W	AG-30B	M30×1.5	16-21	30	30-30.4	12	35	37/36		
	AG-32W	AG-32B	M32×1.5	16-21	32	32-32.4	11	35	39/37		50PCS
	AG-32DW	AG-32DB	M32×1.5	18-25	32	32-32.4	12	40	39/42		
	AG-36W	AG-36B	M36×1.5	18-25	36	36-36.4	12	40	45-41/42		
AG-40W	AG-40B	M40×1.5	22-32	40	40-40.4	14	48	50/53	20PCS		
AG-50W	AG-50B	M50×1.5	32-38	50	50-50.4	14	49	60/61			
AG-63W	AG-63B	M63×1.5	37-44	63	63-63.4	13	50	74/67			
AG-75W	AG-75B	M75×2.0	53-60	75	75-75.4	25	65	86/82	4PCS		
加厚型 thickening	AG-10W	AG-10B	M10×1	3-6.5	12	12-12.3	8	22	15/15	100PCS	
	AG-12SW	AG-12SB	M12×1.5	2-5	12	12-12.3	8	22	17/16		
	AG-14SW	AG-14SB	M14×1.5	2-6	14	14-14.3	8	26	19/19		
	AG-16SW	AG-16SB	M16×1.5	2-6	16	16-16.3	9	26	22/19		
	AG-18SW	AG-18SB	M18×1.5	3-7	18	18-18.3	9	27	24/22		
	AG-20SW	AG-20SB	M20×1.5	5-9	20	20-20.3	11	28	27/24		
	AG-22SW	AG-22SB	M22×1.5	7-12	22	22-22.3	11	30	30/27		
	AG-24SW	AG-24SB	M24×1.5	7-12	24	24-24.4	10	30	30/27		
	AG-27SW	AG-27SB	M27×1.5	9-16	27	27-27.4	10	35	36/33		
	AG-30SW	AG-30SB	M30×1.5	7-15	30	30-30.4	12	35	37/36		
	AG-32W(7-15)	AG-32B(7-15)	M32×1.5	7-15	32	32-32.4	11	35	39/37		50PCS
	AG-32W(13-20)	AG-32B(13-20)	M32×1.5	18-25	32	32-32.4	12	40	39-41/42		
	AG-36SW	AG-36SB	M36×1.5	13-20	36	36-36.4	12	40	45-41/42		20PCS
	AG-40SW	AG-40SB	M40×1.5	20-26	40	40-40.4	14	48	50/53		
AG-50SW	AG-50SB	M50×1.5	25-31	50	50-50.4	14	49	60/61			
AG-63SW	AG-63SB	M63×1.5	29-35	63	63-63.4	14	50	74/67			
AG-75SW	AG-75SB	M75×2.0	48-55	75	75-75.4	25	65	86-82	4PCS		