


# RCCN 日成VDRRC型闭口环保线槽 Wide Close Slot Wiring Duct

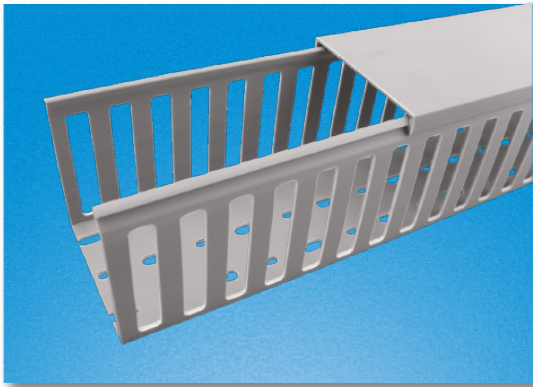



产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。  
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。  
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性佳。  
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。  
 颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)  
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。  
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。  
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。  
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。  
 3.出线孔低、组合容易、拆卸简单、易于配线。

**更多选择:量大可按需求生产所需规格或定制长度.例:VDR8080C(L=1.7M)**


Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.  
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC  
 Work temperature:-40 °c to 65 °c  
 UL94 Flammability Rating of V-0  
 Provided with mounting holes  
 Available color:gray.white.blue.black and other special colors  
**Special length come with MOQ request**



推荐:灰色为常规库存产品,其它颜色有起订量要求。  
 Comment: gray is the common color, other color need more MOQ




样式: 16mm-72mm宽  
 Style: Width from 16mm to 72mm



默认底孔单排孔 Common Hole

样式: 75mm-140mm宽  
 Style: Width from 75mm to 140mm



150宽为5排底孔  
 150 width with 5 lines holes

本系列25/35/45/65/75为非标产品  
 this series is 25/35/45/65/75,they are not standard products

大小孔型号/Eu hole size: VDR4060F/614

单位/Unit:mm

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR2025C	VDR2025CW	VDR2025CE	VDR2025CB	20×25	8.5	11.5	5~15pcs	每支 2米  含槽底槽盖
VDR2525C	VDR2525CW	VDR2525CE	VDR2525CB	25×25	8.5	11.5	10~25pcs	
VDR3025C	VDR3025CW	VDR3025CE	VDR3025CB	30×25	8.5	11.5	12~28pcs	
VDR4025C	VDR4025CW	VDR4025CE	VDR4025CB	40×25	8.5	11.5	20~35pcs	
VDR5025C	VDR5025CW	VDR5025CE	VDR5025CB	50×25	8.5	11.5	12~28pcs	
VDR1530C	VDR1530CW	VDR1530CE	VDR1530CB	15×30	8.5	11.5	8~15pcs	
VDR2030C	VDR2030CW	VDR2030CE	VDR2030CB	20×30	8.5	11.5	25~35pcs	
VDR2530C	VDR2530CW	VDR2530CE	VDR2530CB	25×30	8.5	11.5	25~35pcs	
VDR3030C	VDR3030CW	VDR3030CE	VDR3030CB	30×30	8.5	11.5	25~35pcs	
VDR4030C	VDR4030CW	VDR4030CE	VDR4030CB	40×30	8.5	11.5	30~40pcs	
VDR5030C	VDR5030CW	VDR5030CE	VDR5030CB	50×30	8.5	11.5	40~50pcs	Pcs/Branch 2M  Including tuning and lids
VDR6030C	VDR6030CW	VDR6030CE	VDR6030CB	60×30	8.5	11.5	50~60pcs	
VDR2233C	VDR2233CW	VDR2233CE	VDR2233CB	22×33	8.5	11.5	25~35pcs	
VDR3333C	VDR3333CW	VDR3333CE	VDR3333CB	33×33	8.5	11.5	35~45pcs	
VDR2035C	VDR2035CW	VDR2035CE	VDR2035CB	20×35	8.5	11.5	30~40pcs	
VDR3535C	VDR3535CW	VDR3535CE	VDR3535CB	35×35	8.5	11.5	35~45pcs	
VDR5035C	VDR5035CW	VDR5035CE	VDR5035CB	50×35	8.5	11.5	40~60pcs	
VDR2040C	VDR2040CW	VDR2040CE	VDR2040CB	20×40	8.5	11.5	16~22pcs	
VDR2540C	VDR2540CW	VDR2540CE	VDR2540CB	25×40	8.5	11.5	20~35pcs	
VDR3540C	VDR3540CW	VDR3540CE	VDR3540CB	35×40	8.5	11.5	30~45pcs	
VDR4040C	VDR4040CW	VDR4040CE	VDR4040CB	40×40	8.5	11.5	60~70pcs	
VDR6040C	VDR6040CW	VDR6040CE	VDR6040CB	60×40	8.5	11.5	100~115pcs	
VDR8040C	VDR8040CW	VDR8040CE	VDR8040CB	80×40	8.5	11.5	120~135pcs	
VDR10040C	VDR10040CW	VDR10040CE	VDR10040CB	100×40	8.5	11.5	120~135pcs	
VDR12040C	VDR12040CW	VDR12040CE	VDR12040CB	120×40	8.5	11.5	140~155pcs	

RCCN 日成VDRRC型闭口环保线槽 Wide Close Slot Wiring Duct

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR2545C	VDR2545CW	VDR2545CE	VDR2545CB	25×45	8.5	11.5	20~25pcs	每支 2米 含槽底槽盖
VDR3345C	VDR3345CW	VDR3345CE	VDR3345CB	33×45	8.5	11.5	40~55pcs	
VDR4545C	VDR4545CW	VDR4545CE	VDR4545CB	45×45	8.5	11.5	60~70pcs	
VDR6545C	VDR6545CW	VDR6545CE	VDR6545CB	65×45	8.5	11.5	110~120pcs	
VDR2050C	VDR2050CW	VDR2050CE	VDR2050CB	20×50	8.5	11.5	18~28pcs	
VDR2550C	VDR2550CW	VDR2550CE	VDR2550CB	25×50	8.5	11.5	20~30pcs	
VDR3050C	VDR3050CW	VDR3050CE	VDR3050CB	30×50	8.5	11.5	25~40pcs	
VDR3550C	VDR3550CW	VDR3550CE	VDR3550CB	35×50	8.5	11.5	40~60pcs	
VDR4050C	VDR4050CW	VDR4050CE	VDR4050CB	40×50	8.5	11.5	60~70pcs	
VDR4550C	VDR4550CW	VDR4550CE	VDR4550CB	45×50	8.5	11.5	70~80pcs	
VDR5050C	VDR5050CW	VDR5050CE	VDR5050CB	50×50	8.5	11.5	80~90pcs	
VDR5550C	VDR5550CW	VDR5550CE	VDR5550CB	55×50	8.5	11.5	85~95pcs	
VDR6050C	VDR6050CW	VDR6050CE	VDR6050CB	60×50	8.5	11.5	100~120pcs	
VDR7550C	VDR7550CW	VDR7550CE	VDR7550CB	75×50	8.5	11.5	150~170pcs	
VDR8050C	VDR8050CW	VDR8050CE	VDR8050CB	80×50	8.5	11.5	160~180pcs	
VDR10050C	VDR10050CW	VDR10050CE	VDR10050CB	100×50	8.5	11.5	200~250pcs	
VDR12555C	VDR12555CW	VDR12555CE	VDR12555CB	125×55	8.5	11.5	220~270pcs	
VDR2060C	VDR2060CW	VDR2060CE	VDR2060CB	20×60	8.5	11.5	35~45pcs	
VDR2560C	VDR2560CW	VDR2560CE	VDR2560CB	25×60	8.5	11.5	40~50pcs	
VDR3060C	VDR3060CW	VDR3060CE	VDR3060CB	30×60	8.5	11.5	60~80pcs	
VDR3560C	VDR3560CW	VDR3560CE	VDR3560CB	35×60	8.5	11.5	90~105pcs	
VDR4060C	VDR4060CW	VDR4060CE	VDR4060CB	40×60	8.5	11.5	100~115pcs	
VDR4560C	VDR4560CW	VDR4560CE	VDR4560CB	45×60	8.5	11.5	110~125pcs	
VDR5060C	VDR5060CW	VDR5060CE	VDR5060CB	50×60	8.5	11.5	120~135pcs	
VDR6060C	VDR6060CW	VDR6060CE	VDR6060CB	60×60	8.5	11.5	120~135pcs	
VDR8060C	VDR8060CW	VDR8060CE	VDR8060CB	80×60	8.5	11.5	180~210pcs	
VDR10060C	VDR10060CW	VDR10060CE	VDR10060CB	100×60	8.5	11.5	240~290pcs	
VDR11060C	VDR11060CW	VDR11060CE	VDR11060CB	110×60	8.5	11.5	250~300pcs	
VDR12060C	VDR12060CW	VDR12060CE	VDR12060CB	120×60	8.5	11.5	260~320pcs	
VDR15060C	VDR15060CW	VDR15060CE	VDR15060CB	150×60	8.5	11.5	300~360pcs	
VDR2565C	VDR2565CW	VDR2565CE	VDR2565CB	25×65	8.5	11.5	40~50pcs	
VDR3365C	VDR3365CW	VDR3365CE	VDR3365CB	33×65	8.5	11.5	40~70pcs	
VDR4565C	VDR4565CW	VDR4565CE	VDR4565CB	45×65	8.5	11.5	110~120pcs	
VDR6565C	VDR6565CW	VDR6565CE	VDR6565CB	65×65	8.5	11.5	180~200pcs	
VDR7265C	VDR7265CW	VDR7265CE	VDR7265CB	72×65	8.5	11.5	180~230pcs	
VDR5075C	VDR5075CW	VDR5075CE	VDR5075CB	50×75	8.5	11.5	180~210pcs	
VDR7575C	VDR7575CW	VDR7575CE	VDR7575CB	75×75	8.5	11.5	200~240pcs	
VDR10075C	VDR10075CW	VDR10075CE	VDR10075CB	100×75	8.5	11.5	250~290pcs	
VDR2580C	VDR2580CW	VDR2580CE	VDR2580CB	25×80	10	10	100~120pcs	
VDR3080C	VDR3080CW	VDR3080CE	VDR3080CB	30×80	10	10	110~125pcs	
VDR3580C	VDR3580CW	VDR3580CE	VDR3580CB	35×80	10	10	110~130pcs	
VDR4080C	VDR4080CW	VDR4080CE	VDR4080CB	40×80	10	10	140~160pcs	
VDR4580C	VDR4580CW	VDR4580CE	VDR4580CB	45×80	10	10	140~160pcs	
VDR5080C	VDR5080CW	VDR5080CE	VDR5080CB	50×80	10	10	160~180pcs	
VDR5580C	VDR5580CW	VDR5580CE	VDR5580CB	55×80	10	10	160~180pcs	
VDR6080C	VDR6080CW	VDR6080CE	VDR6080CB	60×80	10	10	180~210pcs	
VDR8080C	VDR8080CW	VDR8080CE	VDR8080CB	80×80	10	10	240~290pcs	
VDR10080C	VDR10080CW	VDR10080CE	VDR10080CB	100×80	10	10	260~350pcs	
VDR12080C	VDR12080CW	VDR12080CE	VDR12080CB	120×80	10	10	280~380pcs	
VDR14080C	VDR14080CW	VDR14080CE	VDR14080CB	140×80	10	10	350~450pcs	
VDR25100C	VDR25100CW	VDR25100CE	VDR25100CB	25×100	10	10	110~160pcs	
VDR33100C	VDR33100CW	VDR33100CE	VDR33100CB	33×100	10	10	130~165pcs	
VDR40100C	VDR40100CW	VDR40100CE	VDR40100CB	40×100	10	10	130~175pcs	
VDR50100C	VDR50100CW	VDR50100CE	VDR50100CB	50×100	10	10	220~250pcs	
VDR60100C	VDR60100CW	VDR60100CE	VDR60100CB	60×100	10	10	240~290pcs	
VDR70100C	VDR70100CW	VDR70100CE	VDR70100CB	70×100	10	10	250~340pcs	
VDR75100C	VDR75100CW	VDR75100CE	VDR75100CB	75×100	10	10	260~350pcs	
VDR80100C	VDR80100CW	VDR80100CE	VDR80100CB	80×100	10	10	260~350pcs	
VDR100100C	VDR100100CW	VDR100100CE	VDR100100CB	100×100	10	10	300~400pcs	
VDR120100C	VDR120100CW	VDR120100CE	VDR120100CB	120×100	10	10	350~450pcs	
VDR150100C	VDR150100CW	VDR150100CE	VDR150100CB	150×100	10	10	400~650pcs	
VDR10130C	VDR100130CW	VDR100130CE	VDR100130CB	100×130	10	10	350~450pcs	
VDR150130C	VDR150130CW	VDR150130CE	VDR150130CB	150×130	10	10	400~500pcs	
VDR200100C	VDR200100CW	VDR200100CE	VDR200100CB	200×100	10	10	600~800pcs	
VDR200150C	VDR200150CW	VDR200150CE	VDR200150CB	200×150	10	10	900~1200pcs	

Pcs/Branch  
2M

Including tuning and lids


每支  
2米

含槽底槽盖

Pcs/Branch  
2M

Including tuning and lids

# RCCN 日成VDRRC型闭口环保线槽 Wide Close Slot Wiring Duct

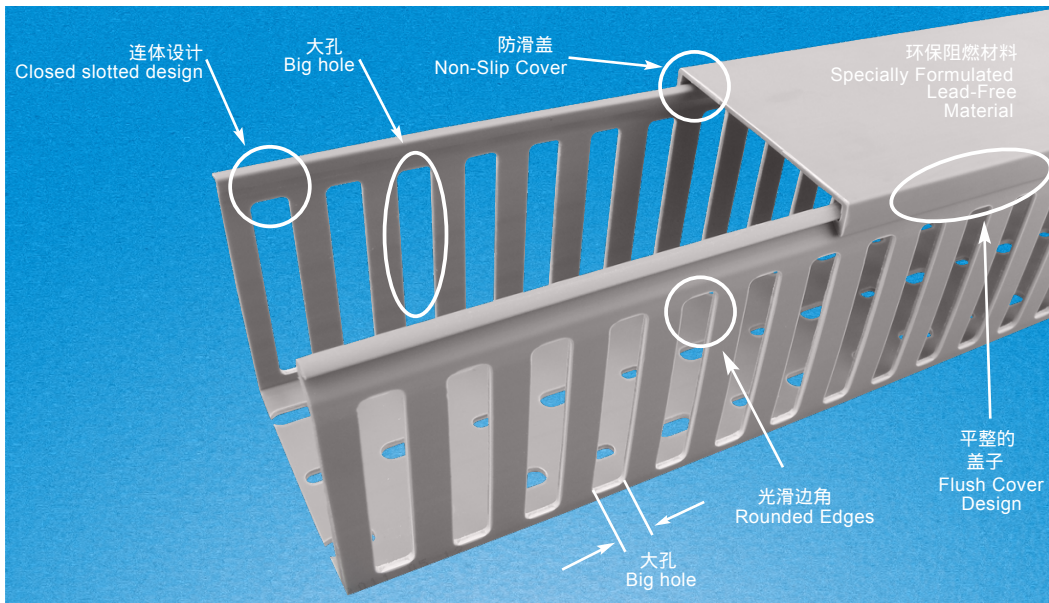

特点/Features	优点/Advantages	益处/Benefits
大的孔 Wide finger and slot design	顶端连体结构,易扣盖子,整体强度大 Solid on the top of wall,easy to cover	可以用于较大的电线或者捆绑的电线 Can be used with a wide range of wire and
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺划伤 Protects hands and wiring/cabling from abrasion
防滑盖 non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover design Greater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
顶部连体开孔设计 Solid design on top wall	方便盖子组合 Convenient to cover	加快线槽的组装时间 Speed wire installation
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamiility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在全球各地均可放心使用 Can provide related certificates of the projects or parts need



RCCN 日成VDRC型闭口环保线槽 Wide Close Slot Wiring Duct

